


Tipo : Type :	E10/L		do: 10 mm	31
Omologazione Homologation	PN	Coefficiente efflusso ridotto Low flow coefficient	Campo di taratura Setting range	
E.D. 2014/68/EU - IV Cat.(PED)	100	0,86	0,3 - 100,0 bar	
EAC	100	0,86	0,3 - 100,0 bar	
ATEX Ex h II 2 Gb	100	0,86	0,3 - 100,0 bar	
ATEX Ex h II 2 Db	100	0,86	0,3 - 100,0 bar	
ASME VIII Div.1	150	0,629	1,0 - 106,0 bar	
Canadian Reg. CRN	150	0,629	1,0 - 106,0 bar	

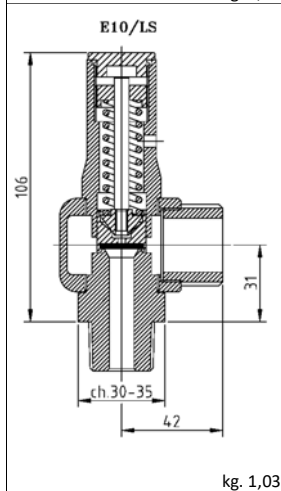

CONFIGURAZIONE - CONFIGURATION

Materiale Material	Ottone Brass	Mista Ottone-Acciaio inox Mixed Brass-Stainless steel	Acciaio inox Stainless steel
Modelli Model	Con ghiera With ring nut	Con ghiera With ring nut	Con ghiera With ring nut
	Senza Ghiera Without ring nut	Senza Ghiera Without ring nut	Senza Ghiera Without ring nut
	/	/	/
	/	/	/
	/	/	/
Sedi di Tenuta Seal System	N.B.R. (Std) -10 / + 100 °C	N.B.R. (Std) -10 / + 100 °C	N.B.R. (Std) -10 / + 100 °C
	E.P.D.M. -50 / + 150 °C	E.P.D.M. -50 / + 150 °C	E.P.D.M. -50 / + 150 °C
	VITON -20 / +200 °C	VITON -20 / +200 °C	VITON -20 / +200 °C
	SILICONE -60 / +200 °C	SILICONE -60 / +200 °C	SILICONE -60 / +200 °C
	PTFE -196 / +250 °C	PTFE -196 / +250 °C	PTFE -196 / +250 °C
Connessione Entrata Inlet Connection	KALREZ -20 / +250 °C	KALREZ -20 / +250 °C	KALREZ -20 / +275 °C
	/	Metal -196 / +250 °C	Metal -196 / +450 °C
	G.1/2" - 3/4" ISO228	G.1/2" - 3/4" ISO228	G.1/2" - 3/4" ISO228
	R.1/2" - 3/4" EN10226	R.1/2" - 3/4" EN10226	R.1/2" - 3/4" EN10226
	1/2" - 3/4" NPT	1/2" - 3/4" NPT	1/2" - 3/4" NPT
Connessione Uscita Outlet Connection	DN20-25 PN16-100	1" - 1 1/2 Tri Clamp	1" - 1 1/2 Tri Clamp
	3/4" - 1" 150-900 lb	DN20-25 PN16-100	DN20-25 PN16-100
	/	3/4" - 1" 150-900 lb	3/4" - 1" 150-900 lb
	/	/	/
	/	/	/

A richiesta possono essere eseguiti collaudi dai più prestigiosi enti quali: INAIL (area ISPESL), TÜV, RINA, Bureau Veritas, ABS e Lloyd Register.
On request tests can be made by the most prestigious societies, such as: INAIL (area ISPESL), TÜV, RINA, Bureau Veritas, ABS and Lloyd Register.

Note:

