




Y-Strainers 140 BAR

During installation and subsequent operation, dirt and impurities flowing through the systems can cause damages. The use of Refrigera Industriale Y-Pattern Strainers will assist in reducing any problems caused by foreign bodies in all branches of a refrigeration

plant, where highly delicate components are present. The strainer body has been designed to minimize the pressure drop across the valve by using a curved profile, which assists in reducing turbulence. Y-Pattern Strainers are sized to allow the collection of a reasonable amount of

material before pressure reductions require the strainer to be cleaned. Y-Pattern Strainer are typically used in applications where the amount of dirt to be removed is small and frequent emptying is not required.

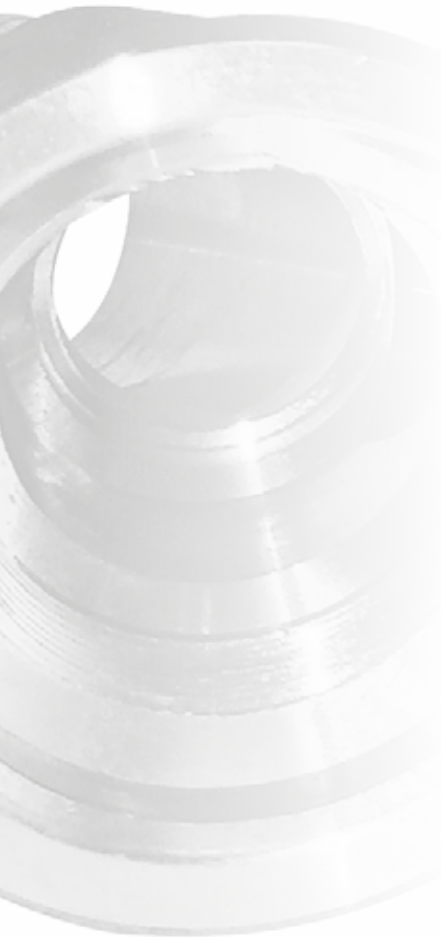

Refriger Industriale Y-Strainers include two Bodies for 2 size ranges:
 1) Range: from 5/8 to 3/4 or 16mm to 22mm.
 2) Range: from 1-1/8 to 1-5/8 or 28mm to 42mm.
 Filter internal Mesh: 85µ

Refriger Industriale Y-Strainers offer a multiple choice for connections:
 - No connections
 - K65 connections
 - Stainless steel connections
 - Hybrid connections

R744



REFRIGERA INDUSTRIALE S.r.l.

info@refrigera.eu
www.refrigera.eu