


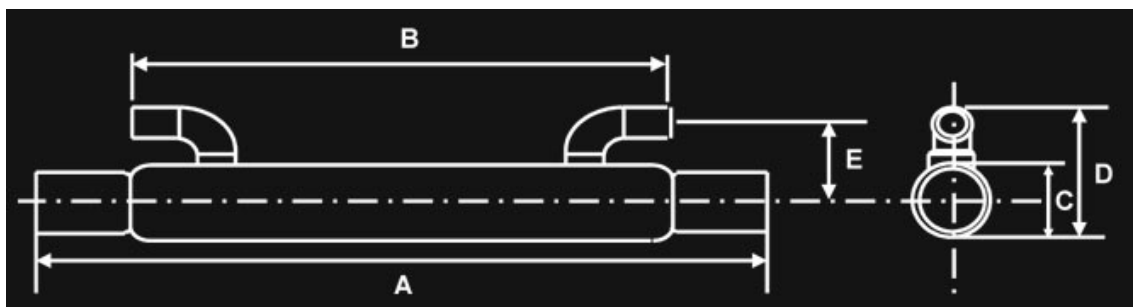

Modèle	H		75	100	150	200	300	500	750	1000	1500	2000
Puissances Frigorifique Evaporator Capacity T0 +10°C/ TC +25°C		KW	2.3	2.9	4.4	5.8	8.7	14.5	20.3	29.1	43.6	58.2
Puissance Nom du Cp (Nom Cond Unit)		CV	0.75	1	1.5	2	3	5	7.5	10	15	20
Raccordement ODF (Connections)	Liquide	mm	3/8	3/8	3/8	1/2	1/2	5/8	7/8	7/8	7/8	11/8
	"	mm	9.53	9.53	9.53	12.7	12.7	15.9	22.2	22.2	22.2	28.6
	Gaz	mm	5/8	5/8	7/8	7/8	11/8	13/8	15/8	21/8	21/8	21/8
	"	mm	15.9	15.9	22.2	22.2	34.9	34.9	41.3	54	54	54
Dimensions	A	mm	298	267	343	279	356	362	406	432	635	686
	B	mm	263	213	289	216	292	303	333	333	521	610
	C	mm	22	28	28	35	35	41	54	67	67	67
	D	mm	46	52	52	63	63	76	97	109	109	126
	E	mm	30	33	33	38	38	46	57	64	64	77
Poids (Weight)		Kg	0.34	0.4	0.56	0.56	0.79	0.95	1.24	2.48	3.6	4.1
Puissance Maximale Frigorifique (Maxi Evaporator Capacity)	+5°	KW	4.11	4.53	7.67	17.2	23.2	30.6	33.5	70.1	74.1	96.4
	0°	KW	3.38	3.72	6.22	14.2	19.2	25.3	27.6	57.6	61.1	79.3
	-5°	KW	2.78	3.06	5.16	11.6	15.6	20.7	22.6	47.2	50	64.8
	-10°	KW	2.26	2.49	4.19	9.39	12.7	16.7	18.4	38.4	40.8	52.7
	-20°	KW	1.81	2.00	3.35	7.61	10.00	13.5	14.8	30.9	32.7	42.3
	-25°	KW	1.44	1.58	2.67	6.02	8.14	10.6	11.5	24.5	26	33.8
	-30°	KW	1.14	1.26	2.13	4.78	6.39	8.49	9.28	19.5	20.5	26.7
	-35°	KW	0.91	1.00	1.64	3.67	4.98	6.52	7.13	15	15.9	20.8
	-40°	KW	0.65	0.72	1.26	2.83	3.91	5.06	5.52	11.6	12.3	15.9