


# DLC

## Drain line heater cable

### Features

- Totally waterproof
- Double insulated
- Extremely flexible
- Heating element : Nickel Chromium or Copper-Nickel alloy wire
- Insulation : Silicone rubber
- Shape : Round 5,5 mm
- End of cable : waterproof silicone moulding
- Cold tail : 1 m
- Output : 40 W/m
- Tolerance : +/- 10 %
- Max. surface temperature : + 200°C
- Min. surface temperature : - 40°C
- Voltage : 230 V

Model		Length in m
DLC-040	40 W/M	1.0
DLC-052	52 W/M	1.3
DLC-060	60 W/M	1.5
DLC-080	80 W/M	2.0
DLC-120	120 W/M	3.0
DLC-160	160 W/M	4.0
DLC-200	200 W/M	5.0
DLC-240	240 W/M	6.0
DLC-320	320 W/M	8.0
DLC-360	360 W/M	9.0
DLC-400	400 W/M	10.0

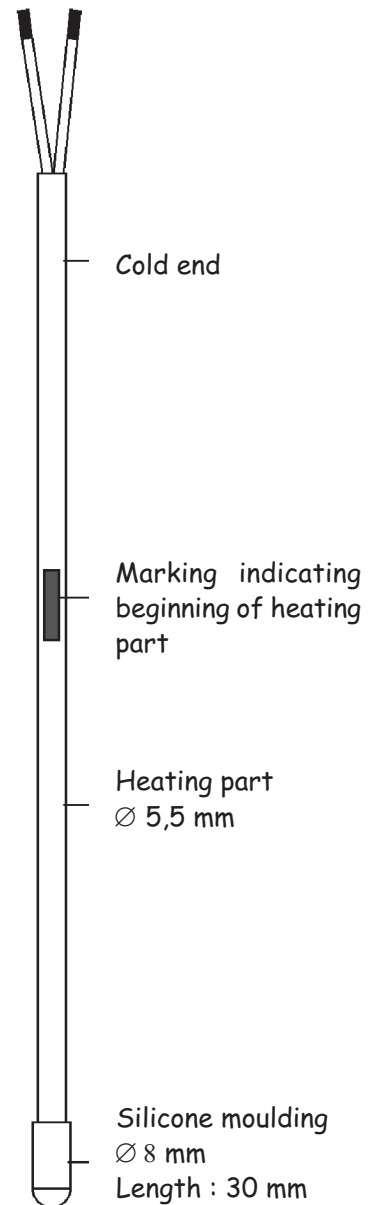

### Caution

These cables cannot be cut to reduce cold end length. These cables have been tested to meet the highest standards.